

UVB 100 - 1 pole



080010-0-X

INCOMING/BRIDGE

2 x 25 mm² - 2,5 mm²
16 mm² - 1,5 mm²



- > modular system
- > user-defined stackable
- > to fit on DIN rail TS 35

OUTGOING

6 x 10 mm² - 1,5 mm²
6 mm² - 1,5 mm²



AL / CU



080010-1-X



080010-2-X



080010-3-X



080010-4-X

For aluminium and copper conductors (Al/Cu)



NOMINAL VOLTAGE

1000 V AC
1000 V AC

NOMINAL CURRENT

100 A Al
101 A Cu

STANDARDS

IEC 61238-1 (Class A)
EN 60998-2-1



Model	Part no.	Type	PU	GTIN / EAN
UVB 100 for aluminium/ copper conductors	080010-0-3	UVB 100 L G	3/54	4051589001038
	080010-1-3	UVB 100 N	3/54	4051589001137
	080010-2-3	UVB 100 PE	3/54	4051589001236
	080010-3-3	UVB 100 L B	3/54	4051589001335
	080010-4-3	UVB 100 L S	3/54	4051589001434

For copper conductors (Cu)



NOMINAL VOLTAGE

1000 V AC

NOMINAL CURRENT

101 A


STANDARDS

EN 60998-2-1



Model	Part no.	Type	PU	GTIN / EAN
UVB 100 for copper conductors	080010-0-4	UVB 100 L G	3/54	4051589800105
	080010-1-4	UVB 100 N	3/54	4051589800112
	080010-2-4	UVB 100 PE	3/54	4051589800129
	080010-3-4	UVB 100 L B	3/54	4051589800136
	080010-4-4	UVB 100 L S	3/54	4051589800143

Power loss UVB 100

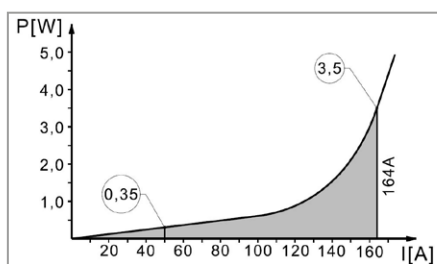

Dimensions:

