

## Technical data

Description: Main Line Branch Terminal 70 mm<sup>2</sup> – 1 pole (Al/Cu)

Construction: Model C – all-side fingersafe, modular system

Item no. : 080310-x-3

Remarks: The product is compliant with the EC ROHS directives

Standards: IEC 60947-7-1, IEC 61238-1, UL-1059 / CSA C22.2 No.158-10, DIN VDE 0603-3-1



Nominal Voltage: 1.000 V AC / 1.000 V DC

Nominal current: Cu 300 A (2x50mm<sup>2</sup>); 192 A (1x70mm<sup>2</sup>) as per IEC 60947-7-1  
Al 300 A (2x50mm<sup>2</sup>)\* as per IEC 61238-1 (Class A)

\* Approved with Reko SFS 4880 (manufactured by Reka Cables Ltd)

Power loss: Tested by SGS Fimko Ltd (FI) (see chart 1)





Terminal cross section:

	2 x 70 mm <sup>2</sup> (round conductor)			2 x 50 mm <sup>2</sup> (round conductor)		
	Cu		Al	Cu		Al
70 mm <sup>2</sup>	10 Nm	-	18 Nm	-	-	-
50 mm <sup>2</sup>		10 Nm	10 Nm	-	-	10 Nm
35 mm <sup>2</sup>		8 Nm	8 Nm	6 Nm	6 Nm	8 Nm
25 mm <sup>2</sup>		6 Nm	6 Nm			6 Nm
16 mm <sup>2</sup>		4 Nm	4 Nm			4 Nm
10 mm <sup>2</sup>	-	-	-	-	-	-
6 mm <sup>2</sup>	-	-	-	-	-	-
4 mm <sup>2</sup>	-	-	-	-	-	-
stripping length	25 mm			20 mm		
screw	M10 (SW 4 mm)			M8 (SW 4 mm)		

Materials: Terminal body: brass (CuZn39Pb2) 3-4µm Ni / 7-10µm Sn  
Housing: PA 6 (Halogen-free)  
Screws: steel Zn thick-film passivated

Flame resistance: Self-extinguishing

Mechanical data: Dimensions: width x height x depth (mm): 40 x 53,3 x 63

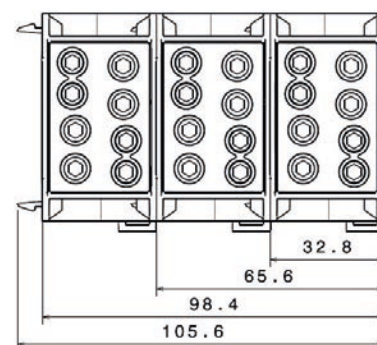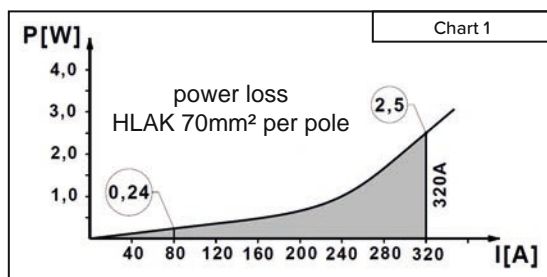

## Design

Basic housing colour – light grey RAL 7035

Part no.	Design	Cover colour	PU	GTIN (EAN)
080310-0-3	L "G"	light grey RAL 7035	3	4051589031035
080310-1-3	N	light blue RAL 5012	3	4051589031134
080310-2-3	PE	yellow-green RAL 6018	3	4051589031233
080310-3-3	L "B"	clay brown RAL 8003	3	4051589031332
080310-4-3	L "S"	jet black RAL 9005	3	4051589031431

## Technical data

Description:	Main Line Branch Terminal 70 mm <sup>2</sup> – 1 pole (Cu)
Construction:	Model C – all-side fingersafe, modular system
Item no. :	080310-x-4

Remarks: The product is compliant with the EC ROHS directives

Standards: IEC 60947-7-1, DIN VDE 0603-3-1



Nominal Voltage: 1.000 V AC / 1.000 V DC

Nominal current: Cu 300 A (2x50mm<sup>2</sup>); 192 A (1x70mm<sup>2</sup>) as per IEC 60947-7-1

Power loss: Tested by SGS Fimko Ltd (FI) (see chart 1)





Terminal cross section:

	2 x 70 mm <sup>2</sup> (round conductor)		2 x 50 mm <sup>2</sup> (round conductor)	
	Cu		Cu	
70 mm <sup>2</sup>				
50 mm <sup>2</sup>	10 Nm	10 Nm	-	-
35 mm <sup>2</sup>				
25 mm <sup>2</sup>				
16 mm <sup>2</sup>				
10 mm <sup>2</sup>	-	-	6 Nm	6 Nm
6 mm <sup>2</sup>				
4 mm <sup>2</sup>	-	-	-	-
stripping length	25 mm		20 mm	
screw	M10 (SW 4 mm)		M8 (SW 4 mm)	

Materials: Terminal body: brass (CuZn39Pb2) bright  
 Housing: PA 6 (Halogen-free)  
 Screws: steel Zn thick-film passivated

Flame resistance: Self-extinguishing

Mechanical data: Dimensions: width x height x depth (mm): 40 x 53,3 x 63

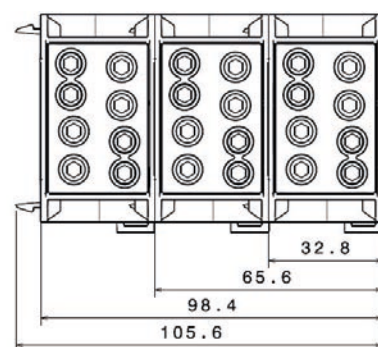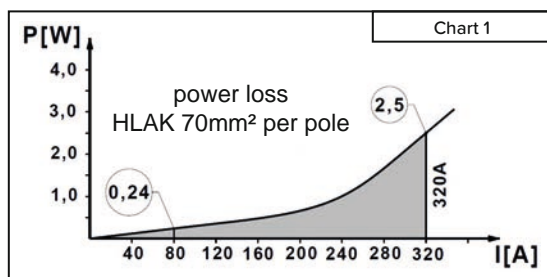

## Design

Basic housing colour – light grey RAL 7035

Part no.	Design	Cover colour	PU	GTIN (EAN)
080310-0-4	L "G"	light grey RAL 7035	3	4051589803106
080310-1-4	N	light blue RAL 5012	3	4051589803113
080310-2-4	PE	yellow-green RAL 6018	3	4051589803120
080310-3-4	L "B"	clay brown RAL 8003	3	4051589803137
080310-4-4	L "S"	jet black RAL 9005	3	4051589803144