

SSAK 16 - fingersafe



086105-0-4

BUSBAR CROSS SECTION / INCOMING

1 x Cu busbar strength (height) 3 - 10 mm
depth (width) minimum 10 mm



OUTGOING

2 x 16 mm² - 1,5 mm²
10 mm² - 1 mm²



086105-1-4



086105-2-4



086105-3-4



086105-4-4

For copper conductors (Cu)




NOMINAL VOLTAGE	NOMINAL CURRENT	STANDARDS
690 V	114 A	IEC 60947-7-1

Model	Part No. *	Type	PU	GTIN / EAN
SSAK 16 for copper conductors	086105-0-4	SSAK 16 L G	12	4051589610506
	086105-1-4	SSAK 16 N	12	4051589610513
	086105-2-4	SSAK 16 PE	12	4051589610520
	086105-3-4	SSAK 16 L B	12	4051589610537
	086105-4-4	SSAK 16 L S	12	4051589610544

* Other colours available on request

Dimensions:

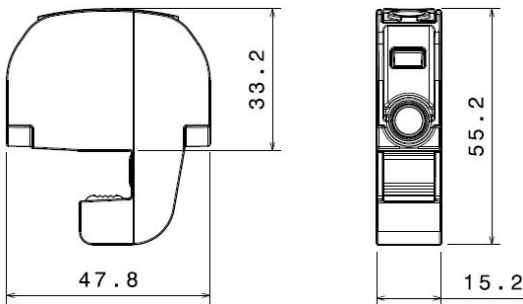

SSAK 10 & 16 - unisolated



NOMINAL VOLTAGE	NOMINAL CURRENT	OUTGOING
690 V	82 A	2 x 10 mm ² SSAK 10
690 V	114 A	2 x 16 mm ² SSAK 16

BUSBAR CROSS SECTION / INCOMING

Cu busbar strength (height) 3 - 10 mm / depth (width) minimum 10 mm

Part no.	Type	PU	GTIN / EAN
086005-9-2	SSAK 10	12	4051589600590
086105-9-2	SSAK 16	12	4051589610599